

# EZ-8

Fueling people on the go for over 18 years  
with gas station equivalent flow!



LEGACY OF RETAIL  
FUEL TRANSFER SOLUTIONS

8 GPM | 30 L/min

12V DC  
Voltage (Power Source)



Item# 137100-01 shown

## The GPI 12V DC EZ-8 Fuel Transfer Pump is **THE PUMP OF CHOICE**

for refueling recreational vehicles, featuring a rotary gear design made from durable, lightweight, corrosion-resistant diecast aluminum.

The 12V DC motor delivers gas station equivalent flow rates of up to **8 GPM for gasoline, diesel fuel, ethanol blends, and kerosene**. It is the perfect pump for on-the-go fueling for agriculture and automotive applications. Mount this dependable pump to fuel drums or tanks up to 100 gallons, and you are ready to go off-roading, cruise the lake, or achieve "yard of the week" mowing status.

### EASY MAINTENANCE

Self-priming, low maintenance design

### SMART DESIGN

Extremely lightweight design, less stress on small tanks and barrels

### EASY INSTALLATION

Easy installation and direct tank mounting

### LONG LIFE

Thermal overload protection extends pump life

### Gas Station Equivalent FLOW RATE



Suitable for gasoline up to E15, diesel fuel up to B20, and kerosene

### Lightweight, RUGGED



EZ-8 pump weighs only 8.5 lbs. Powder-coated aluminum body provides corrosion resistance.

### Special Models AVAILABLE



- Spin Collar Mount  
Item# 137100-05
- Methanol Pump Only  
Item# 137700-01

GREAT PLAINS INDUSTRIES



# EZ-8

Fueling people on the go for over 18 years  
with gas station equivalent flow!




LEGACY OF RETAIL  
FUEL TRANSFER SOLUTIONS

## LIGHT & DEPENDABLE FUEL PUMP

that delivers gas station equivalent flow rate (up to 8 GPM)

Extremely Compact Design allowing easy installation and versatile pump mounting

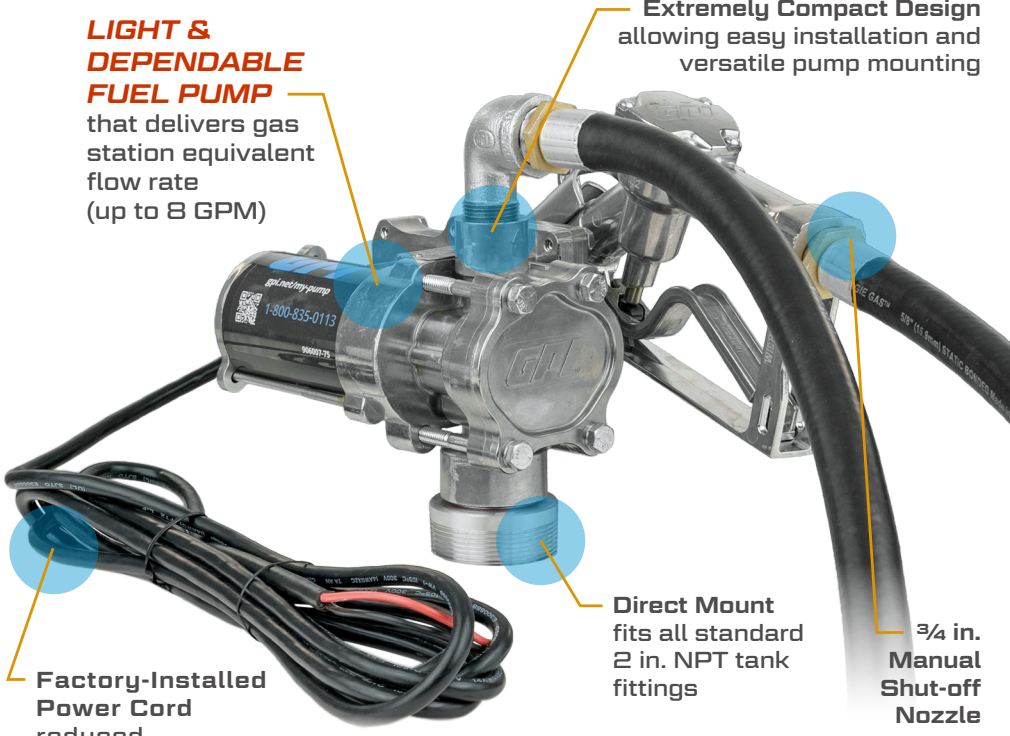

Factory-Installed Power Cord reduced installation time

Direct Mount fits all standard 2 in. NPT tank fittings

3/4 in. Manual Shut-off Nozzle

Item# 137100-01 shown

## SPECS (ALL MODELS)

<b>Max. Flow Rate:</b>		8 GPM   30 L/min
<b>Voltage, Input:</b>		12V (DC)
<b>Pump Technology:</b>		Rotary Gear
<b>Motor HP:</b>		0.10
<b>Duty Cycle:</b>		15 min. on / 30 min. off
<b>Max. Discharge Pressure:</b>		Up to 15 PSI (1.03 bar)
<b>Suction Pipe:</b>		Polypropylene, Telescoping 15 to 40 in. x 1 in. MNPT
<b>At Sea Level 70° F (21.1° C)</b>	<b>Suction Lift:</b>	Up to 5 ft. (1.5 m)
	<b>Discharge Lift:</b>	Up to 10 ft. (3 m)
<b>Pump Housing:</b>		Powder Coated, Corrosion-Resistant Diecast Aluminum
<b>Warranty:</b>		Two-Year Pump Warranty

Refer to manual for wiring instructions

The preferred pump for fueling on the go in agriculture, recreational, landscaping, and more!



### FLUIDS+

Gasoline up to E15 | Diesel Fuel up to B20 | Kerosene



See Available Models

